


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

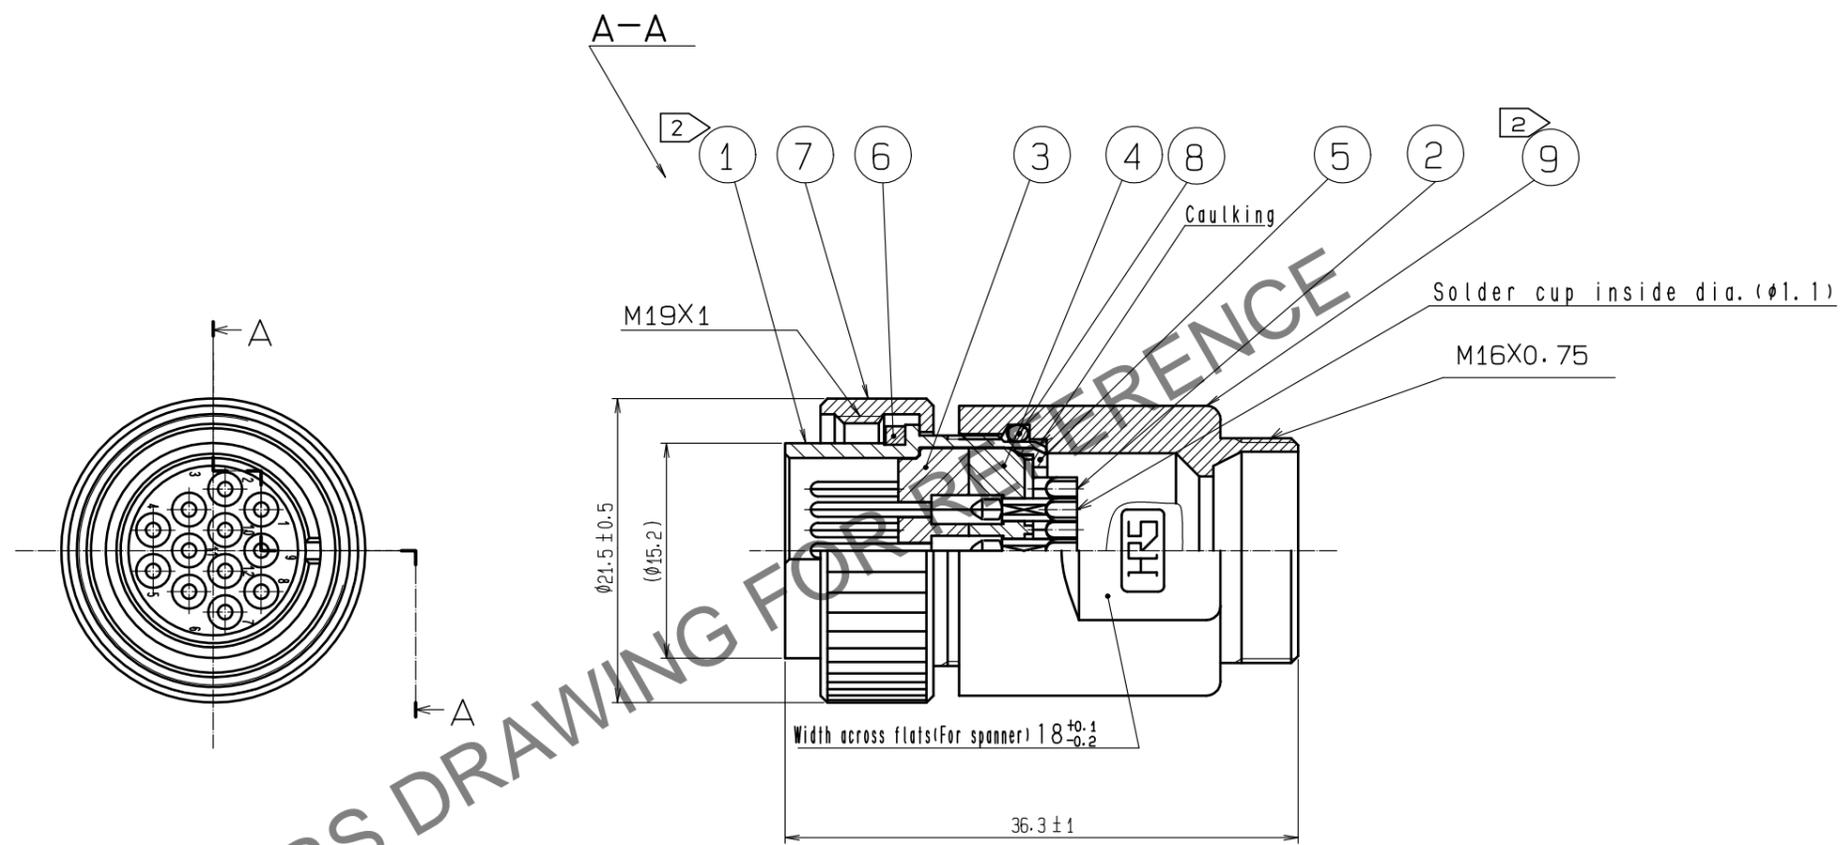

- Notes 1 Rotation example of Ref. No. ① and ⑨ are shown.
 2 The tightening torque of Ref. No. ⑨: 2 to 3 N·m.
 Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ① in order to prevent loosening.
 3 This product to be used with cable clamp, JR13WCC-(72).
 * designate diameter of applicable cable.
 4 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	Polyacetal	(White)			
4	Polyphenylene sulfide	(Black)	9	Zinc alloy	Chrome plating
3	Polyphenylene sulfide	(Black)	8	Silicone rubber	(Black)
2	Copper alloy	Silver plating 2μm min.	7	Brass	Chrome plating
1	Zinc alloy	Chrome plating	6	Silicone rubber	(Red)

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
HIROSE ELECTRIC CO., LTD.			APPROVED : TP. KOMATSU 20230131 CHECKED : HY. KOBAYASHI 20230131 DESIGNED : HT. ZENBA 20230131 DRAWN : KR. SUZUKI 20230131	DRAWING NO. EDC-111071-81-00 PART NO. RM15WTPZ-12P(81) CODE NO. CL0109-1620-6-81		