

IE-C5DB4WE0050MCSXXX-E**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Assembled IE cables, railway cable RW (reduced wire),
Cat. 5, PUR, black, M12

General ordering data

Version	System cable, M12 D-code – IP 67 straight pin, Open, Cat.5 (ISO/IEC 11801), Radox GKW S, 5 m
Order No.	1269740050
Type	IE-C5DB4WE0050MCSXXX-E
GTIN (EAN)	4050118060614
Qty.	1 pc(s).
Available until	2013-12-06

Creation date July 9, 2025 9:28:25 AM CEST

Catalogue status 04.07.2025 / We reserve the right to make technical changes.

IE-C5DB4WE0050MCSXXX-E

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Length	5 m	Length (inches)	196.85 inch
Net weight	320 g		

Temperatures

Storage temperature	-40 °C...90 °C	Operating temperature	-40 °C...90 °C
---------------------	----------------	-----------------------	----------------

Cable specific standards

Corrosiveness of fumes	to IEC 60754-2	Fire protection in buses	According to ISO 6722-1 5.22 (UN ECE-R 118.01)
Fire safety for railway vehicles	According to DIN 5510-2 fire safety levels 1,2,3,4, According to BS 6853, According to EN50288-2-2, According to EN 45545, HL1 - HL3	Flames propagate vertically on bundled cables	According to BS4066-3, DIN EN 50266-2-5, According to IEC 60332-3-25 D
Fluorine content	According to EN 60684-2 Section 45.2	Hydrogen halide content	According to EN-50267-2-1, According to IEC 60754-1
Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2	Multi-wire metallic data and control cable	According to EN50288-2-2
Poisonous gases	According to BS 6853 Appendix B		

General standards

Connector standard	IEC 61076-2-101
--------------------	-----------------

Standards

Connector standard	IEC 61076-2-101	Corrosiveness of fumes	to IEC 60754-2
Fire safety for railway vehicles	According to DIN 5510-2 fire safety levels 1,2,3,4, According to BS 6853, According to EN50288-2-2, According to EN 45545, HL1 - HL3	Flames propagate vertically on bundled cables	According to BS4066-3, DIN EN 50266-2-5, According to IEC 60332-3-25 D
Fluorine content	According to EN 60684-2 Section 45.2	Hydrogen halide content	According to EN-50267-2-1, According to IEC 60754-1
Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2	Multi-wire metallic data and control cable	According to EN50288-2-2
Poisonous gases	According to BS 6853 Appendix B		

Cable structure

Cross-section	2*2*AWG 22/7 - 2*2*0.36 mm ²	Insulation cross-section	1.58 mm
Material sheath	Radox GKW S	Sheath diameter, max.	7 mm
Sheath diameter, min.	6.2 mm	Sheathing colour	black
Shielding	SF/UTP	Strands	7

Creation date July 9, 2025 9:28:25 AM CEST

Catalogue status 04.07.2025 / We reserve the right to make technical changes.

2

IE-C5DB4WE0050MCSXXX-E

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Electrical properties of cable

Category Cat.5 (ISO/IEC 11801)

Mechanical and material properties of cable

Abrasion resistance	very good	Corrosiveness of fumes	to IEC 60754-2
Halogen	halogen-free, according to IEC 60754-2	Impervious to smoke	According to BS 6853 Appendix D, in accordance with EN 50268-2, According to IEC 61034-2
Min. bending radius, repetitive	6 * diameter	Resistance to oils	in accordance with EN 50306-3

Plug, left

Plug left M12, D-coded, IP67, male contact, straight, plug, Plastic, shielded

Plug, right

Plug right free conductor end

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ETIM 8.0	EC002599	ETIM 9.0	EC002599
ETIM 10.0	EC002599	ECLASS 9.0	27-06-03-08
ECLASS 9.1	27-06-03-08	ECLASS 10.0	27-06-03-08
ECLASS 11.0	27-06-03-08	ECLASS 12.0	27-06-03-08
ECLASS 13.0	27-06-03-08	ECLASS 14.0	27-06-03-08
ECLASS 15.0	27-06-03-08		

Approvals

ROHS Conform

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	67cf1078-beca-4687-860b-dc475a6ec24a

Downloads

Engineering Data	CAD data – STEP CAD data – DWG CAD data – DXF
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN PI PROFINET CABLING EN PI PROFINET CABLING EN

Creation date July 9, 2025 9:28:25 AM CEST

Catalogue status 04.07.2025 / We reserve the right to make technical changes.

Data sheet


IE-C5DB4WE0050MCSXXX-E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Wiring diagram

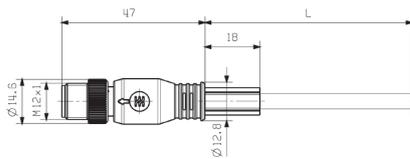

	M12
yellow	1
white	2
orange	3
blue	4

Detailed drawing



IE-C5DB4WE0050MCSXXX-E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Tools



The CST with blue blade cartridge produces the best stripping results. The blue double-stage blade cartridge is particularly suited for Ethernet cables. It saves time and also ensures optimal stripping results.

General ordering data

Type	IE-CST	Version
Order No.	9204350000	Tools, Sheathing strippers
GTIN (EAN)	4032248653072	
Qty.	1 pc(s).	

TM HF 12 mm



The TM sleeves contain no halogens and virtually no pollutants. The sleeves are equipped with the TM-I 12 or TM-I 18 tags. They cover a wide range of applications for cables and lines. This system has particularly proved its worth in traffic engineering. The slim design guarantees firm seating on the conductor.

- Halogen-free
- The slim design guarantees firm seating on the conductor
- TMX 18 for mounting with cable-ties (width 3.6 mm)

General ordering data

Type	TM 4/12 HF/HB	Version
Order No.	1719840000	TM, Socket x 11.4 mm, Polyethylene LD, Colour: Transparent,
GTIN (EAN)	4008190353193	Conductor O.D.: 6 - 10 mm
Qty.	500 pc(s).	

IE-C5DB4WE0050MCSXXX-E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Tools

Sheathing stripper for PVC cables



General ordering data

Type	AM 12	Version
Order No.	9030060000	Tools, Sheathing strippers
GTIN (EAN)	4008190337827	
Qty.	1 pc(s).	

TM HF 18 mm



The TM sleeves contain no halogens and virtually no pollutants. The sleeves are equipped with the TM-I 12 or TM-I 18 tags. They cover a wide range of applications for cables and lines. This system has particularly proved its worth in traffic engineering. The slim design guarantees firm seating on the conductor.

- Halogen-free
- The slim design guarantees firm seating on the conductor
- TMX 18 for mounting with cable-ties (width 3.6 mm)

General ordering data

Type	TM 4/18 HF/HB	Version
Order No.	1719850000	TM, Socket x 11.4 mm, Polyethylene LD, Colour: Transparent,
GTIN (EAN)	4008190353209	Conductor O.D.: 6 - 10 mm
Qty.	500 pc(s).	